



STRYKE

LED Tri-proof Light

165lm/W | 9/12/15/18W | 8/25/30/36W | 25/32/40/50W



DALI
Control



3CCT-in-1



Microwave
Sensor



Emergency



Lumen Output
Selectable

CE

RoHS

ErP

CB

**5 Years
Warranty**

APPLICATIONS

- ✓ Warehouse
- ✓ Large shopping mall Parking
- ✓ Industrial workshop
- ✓ Garage
- ✓ Manufacturing facilities

FEATURES

- ✓ 4-power-in-1 And 3-CCT Tunable.
- ✓ Quick Wiring with easy openable cover and internal wiring terminal.
- ✓ Anti-glare cover to make better light effect.
- ✓ DALI, Microwave Motion Sensor And Emergency Pack as Options.

4-power-in-1 And 3CCT Tunable


In order to quickly response to open projects.
The Stryke is designed to allow the end users adjust the color temperature and powers by DIP switches according to the real needs on site, which will also reduce the inventory greatly.

3CCT Tunable

Cut off the power before operate the switch	
CCT	Switch
5000K	
4000K	
3000K	

4-Power-in-1

Item	PIN1-ON PIN2-ON	PIN1-ON PIN2-OFF	PIN1-OFF PIN2-ON	PIN1-OFF PIN2-OFF
0.6m	18W	15W	13W	10W
1.2m	36W	30W	25W	20W
1.5m	50W	43W	36W	29W

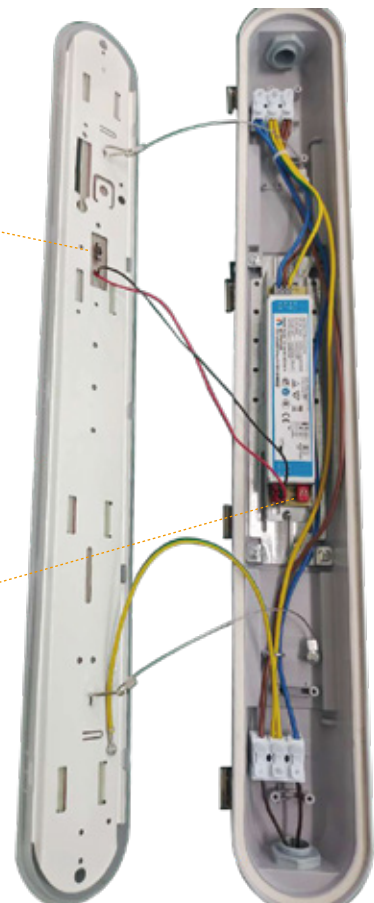

PRODUCT DATA

General Information

LED Type	Chinese brand 2835	
Light Efficacy	165lm/W	
3CCT Tunable	3000K/4000K/5000K	
CRI	80	
LED Lifespan	600mm/1200mm:	1500mm:
	203,000h@L70B50	189,000h@L70B50
	133,000h@L80B50	124,000h@L80B50
	71,000h@L90B50	67,000h@L90B50
Power Supply	Osram	
Type of Driver	Non-dimmable/ Sensor/ Emergency:XZ-	
	Power; DALI: Osram driver	
IEC Warranty	5 Years Warranty	
Certificate	CE, CB, RoHS	

Application Conditions


Operating Temperature: -10°C to +50°C

Approval and Application

Ingress protection code	IP65
Mech. impact protection code	IK08

Light Distribution Curve

120±5deg



Operating and Electrical

Input voltage	220-240Vac
Input Frequency	50/60Hz
Power Factor	≥ 0.9


Mechanical and Housing

Material Body	SPCC
Material Cover	Poly carbonate (PC)
Fixture Color	Grey base/Transparent & striped cover
Mounting Option	Suspended / Wall mounted

Controls and Dimming

Dimmable	On/Off
Intelligent Control	Dali /Emergency Pack /Microwave sensor control

Drawing

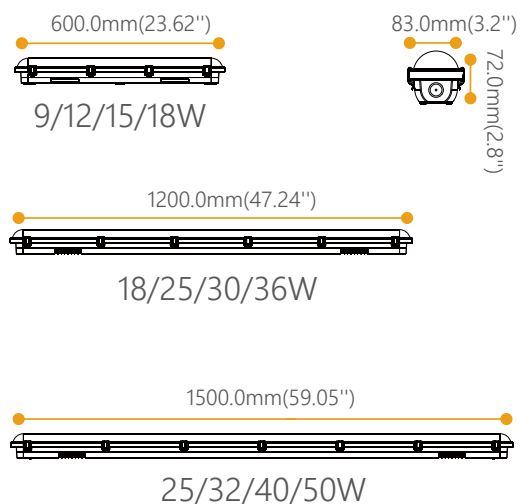

PRODUCT PARAMETER

Model Number	Power Consumption (±10%)	Input voltage	CRI	Light Efficiency	Luminous Flux (lm) (±10%) @4000K	Loop In/ out connection	Beam Angle	Correlated Color Temperaure	LED Type	Drvier Type
T10115 STRYKE- LED-9/12/15/18-50-600	9/12/15/18W	220-240VAC	80	165lm/W	1485/1980/2475/2970 lm	≤90PCS	120Deg	3000K 4000K 5000K	Chinese brand 2835	Philips
T10116 STRYKE- LED-18/25/30/36-50-1200	18/25/30/36W				2970/4125/4950/6000 lm	≤45PCS				
T10117 STRYKE- LED-25/32/40/50-50-1500	25/32/40/50W				4125/5280/6600/8250 lm	≤30PCS				

WIRING DIAGRAM

Standard



Serial Link



L06: 90pcs
 0.6M / 1.2M / 1.5M ---- < L12: 45pcs
 L15: 30pcs

ACCESSORIES



Fast connector



Suspension kit



Bracket